

**60 YEARS
OF EXPERIENCE**

**THE ACTUATORS
MADE IN FRANCE**



LINEAR ACTUATORS



LINEAR ACTUATORS

CHARACTERISTICS

- ✓ Thrust until 600 000 N
- ✓ Single acting and double acting – Fail safe closing or opening
- ✓ Fluid media: air, water, oil, natural gas
- ✓ Temperature of use: -20°C to +80°C (on demand: -55°C /+140°C)
- ✓ Cylinders sizes: Ø 90 mm to 1100 mm
- ✓ Strokes : until 750 mm

SUPPLY PRESSURE

- ✓ 2.5 barg to 140 barg for pneumatic application
- ✓ 30 barg to 400 barg for hydraulic application

STANDARD DESIGN

- ✓ Carbon steel cylinder with Epoxy PTFE coating (others on demand)
- ✓ Carbon steel flanges
- ✓ High alloy tie rods
- ✓ Piston rods hard chromed carbon steel
- ✓ Topwork acc. to ISO 5211
- ✓ Connections: 1/4" to 1" as standard (others on demand)

OPTIONS

- ✓ Control systems
- ✓ Manual override (hydraulic hand pump or handwheel)
- ✓ Adjustable end stops (Opening and/or Closing)
- ✓ Limit switches
- ✓ Safety tank
- ✓ Electro-hydraulic
- ✓ Fire Proofing
- ✓ Special studies acc. to your request
- ✓ Fast Strokes
- ✓ Subsea


GDF SUEZ



SAMSUNG



Versatile product by nature through a wide range of sizes

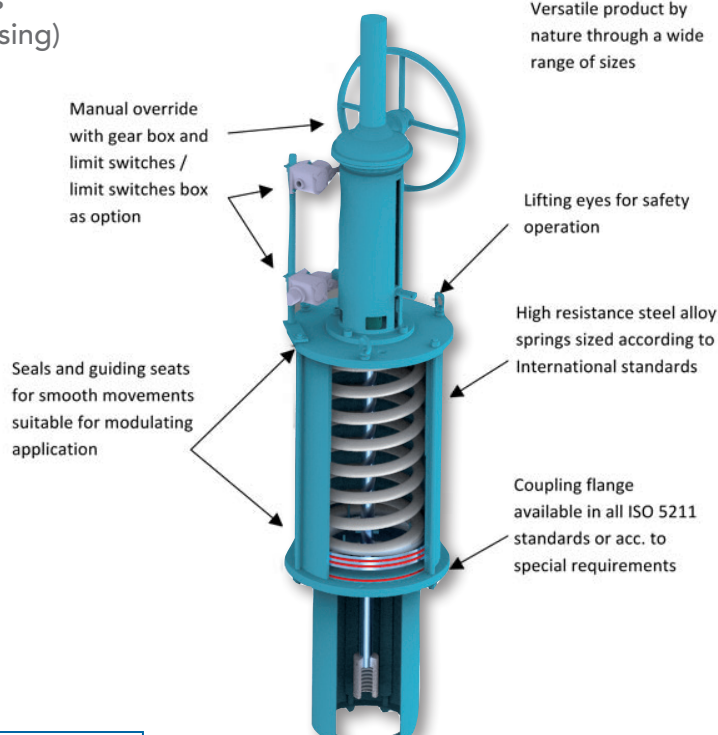

PED 97/23/EC / ATEX 94/9/EC / SIL 3 - EXIDA

Rue de l'Europe - 59320 Sequedin (France) - www.actor.fr

Tél. : +33 (0)3 20 66 27 00 - Fax : +33 (0)3 20 66 27 09 - E-Mail : sales@actor.fr